

# Musset

Wall light fitting - mood lighting

© three-dimensional trademark



LED

Design: Sammode Studio

## Wall light fitting for mood lighting

### Light design

- 3 different reflectors in anodised aluminium (silver, coppery, golden)

### Housing

- Ø100 mm diffuser in borosilicate glass
- End caps 1/2 ring press-formed in 304L stainless steel (316L also available)
- Gaskets moulded in EPDM
- Cable entry with nickel-coated brass cable gland for cable Ø5 - 14 mm

### Gear tray

- Stainless steel gear tray with 2 porcelain E14 sockets
- Including 2 clear E14 LED filament lamps (3W, 2700K)
- Internal wiring with silicone isolated wires braided with glass fibre

### Reflectors

- Range of reflectors in anodised aluminium sheeting: silver, coppery, golden

### Installation



- Connection to a 3x2.5 mm<sup>2</sup> terminal block
- Fixing with 2 reinforced spring-loaded stainless steel straps with variable centre distance and allowing 360° orientation (available as model with screw closure)
- In vertical position, cable gland to be positioned downwards

### Easy maintenance

- Maintenance by releasing the 2 closing screws, removing the end caps and sliding the gear tray

Electrical class	Class I
Supply voltage	220/240V 50Hz
Sealing	IP66, IP68 and IP69K
Shock resistance	IK07
Operating temperature	-20°C +30°C



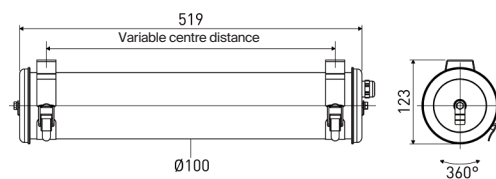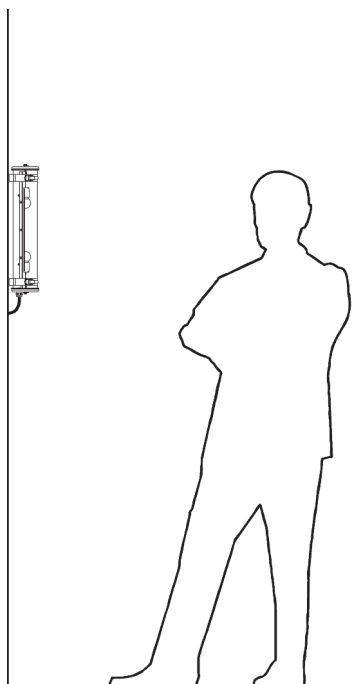

Accessory:  
Cable plate: code CP00481

## Principal part numbers

Power	Designation	Part No.	Optics	Weight (kg)
2x3W	<b>Reflector in mirror-finish aluminium - Silver</b> MUSSET 827 PY 113LN SIL	1522 0010		2.7
2x3W	<b>Reflector in mirror-finish aluminium - Copper</b> MUSSET 827 PY 113LN COP	1522 0020		2.7
2x3W	<b>Reflector in mirror-finish aluminium - Gold</b> MUSSET 827 PY 113LN GOL	1522 0030		2.7

## Options

DESCRIPTION	OPTION CODE	DESCRIPTION	OPTION CODE
<b>Finishing</b>		<b>Fixings</b>	
End caps and fixing straps in 316L stainless steel	MR	Fixing straps reinforced with HSHC screw	BRV
		Reinforced fixing straps with tamper-resistant Torx screw	BRVT