


Ra Wall

Assembly instructions



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

Your box should contain

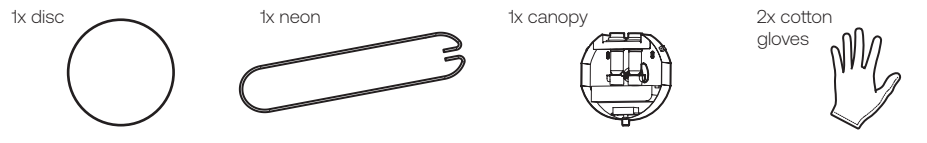

Tools needed, not included

- Junction box and screw
- Philips screwdriver
- Wire connectors
- Pencil
- Level

1 Place the canopy in the desired final position and with a pen, mark down the positions of the two slotted holes.

2 Install appropriate anchors on the mounting surface and screw the canopy without fully tightening it up.

3 First, connect the two ground cables (green cables) together.

Then, connect the live and neutral wires. If the installation requires it, connect the DALI dimming wires.

4 Gently insert the neon tube in the glass housings and push in place the black caps to the glass necks. Secure with straps on each side of the neon by screwing in place.

! Avoid any shocks or torsion to the neon tube.

! (Shut off main power at the circuit breaker panel)

Ceiling wires	Fixture wires	For DALI dimming 220V only
Live	120V Black Brown	
Neutral	White Blue	Purple + DC+
Ground	Green screw	Grey - DC-

5 Adjust with level and secure by screwing in place.

6 Carefully screw the disk in the center of the housing. Place a hand under the disk to avoid any fall while installing.

! Use cotton gloves provided to avoid marking with fingerprints

7 When tuning power back on, you can dim the light directly on the fixture with the knob under the disk. **(120V installation ONLY)**