

STORM MEDIUM PLASTER RING

DATA

Collection	STORM SYSTEM®
Product	Storm Medium Plaster Ring
Article no.	1A01.0001.01

SPECIFICATIONS

Weight	60 g
Material	ABS
Load	5 kg (see step 2)

ADDITIONAL REQUIREMENTS

Fixture	Product from the STORM SYSTEM® MEDIUM collection
---------	--

OPTIONAL ACCESSORIES

Storm Medium	
Extension Basic	1A01.0015.xx.yy
Storm Medium Front Ring	1A01.0018.xx
Storm Medium Cabinet	1A01.0056.01

NOTE

An installation ring for plasterboard, wooden, and acoustic ceilings.

If installing Storm Output, please be aware of the chosen pendant's static load. The anchoring of Storm Plaster Ring / ceiling must be carried out so that it corresponds with the chosen pendant's load.



IMPORTANT! It is crucial that the qualified personnel – painter or acoustic supplier installing this product, is handed this installation guide and follows it very carefully. Correct execution is paramount to the final result

STORM SYSTEM®

The Storm Medium Plaster Ring is part of the STORM SYSTEM® MEDIUM collection. A collection that includes a wide range of special designed products.

The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Medium Plaster Ring is an installation ring for plasterboard and acoustic surfaces. To ensure the installation flushes the surface and appears with an absolute minimum of visibility the installation ring must be covered with filler. The Storm Medium Plaster Ring holds all products in the STORM SYSTEM® MEDIUM collection.



Watch installation video



IMPORTANT INFORMATION

Installation and mounting must be performed by skilled personnel only, and instructions must be followed.

CLEANING AND MAINTENANCE:


Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS


- Storm Medium Plaster ring
- Foam plug




ADDITIONAL REQUIREMENTS - not included

- 5 x screws

Head diameter is crucial for succesful installation



SUSPENSION

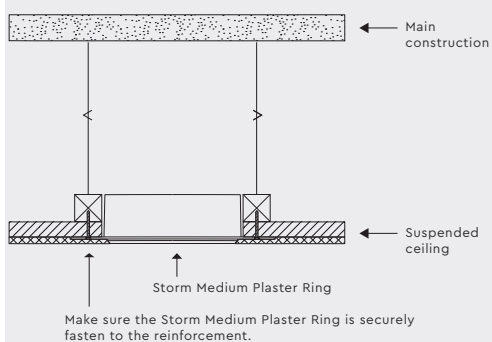


STORM MEDIUM PLASTER RING

ASSEMBLY INSTRUCTION

STEP 1

Cut a round hole with a diameter of 105 mm



STEP 2


Place the plaster ring in the hole and securely fasten it with screws. Remove all burrs.

Make sure that there is an optimal base for a secure attachment. *See detail Attachment must obtain a static load of minimum 5kg

Static load > 5kg

If heavy load is required, ex. heavy pendants, the attachment must be anchored in the main construction above suspended ceiling.


NOTE It is the installer's responsibility to use the correct screws to ensure the optimal attachment






STEP 3

When plastering the ceiling, the foam plug should be placed inside the plaster ring. Exercise caution when plastering to prevent damage of the plastering.

BE AWARE: DO NOT TOUCH THE EDGE OF THE PLASTER RING WHEN SANDING!




Screwfast surface



STEP 4

Remove the foam plug when the plastering is finished.

Please note that it is very important that the inside of the plaster ring is kept free of filler and paint. Any residue has to be removed. The plaster ring edge must not be damaged.



IMPORTANT INFORMATION

Installation and mounting must be performed by skilled personnel only, and instructions must be followed.

CLEANING AND MAINTENANCE:


Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS

- Storm Medium Plaster ring
- Foam plug




STORM MEDIUM PLASTER RING

ASSEMBLY INSTRUCTION

INSTALLATION OF DUCT PIPE – ONLY FOR AIR IN AND AIR OUT

Storm Medium Air In/Out is compatible with Ø100mm duct piping

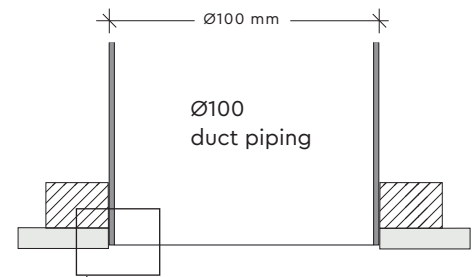

Make sure the ventilation ducts pipe's outer diameter fits the hole in the ceiling.

Make sure the ventilation ducts is positioned correctly. Then mount the Storm Plaster Ring according to the installation guide.

