


STORM SYSTEM®

The Storm Small P300 is part of the STORM SYSTEM® collection. A collection that includes a wide range of special designed products. The STORM SYSTEM® collection is carefully designed to flush the surface of any ceiling or wall, and all products will appear with an absolute minimum of tolerance and visibility.

Storm Small P300 is a pendant combination of components within the Storm Small collection. The top of the pendant is a Storm Small Output. The bottom fixture is interchangeable. P300 is compatible with various Storm Small Light products.



The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal

For more information, please contact info@onea.dk

STORM SMALL P300

DATA

Collection	STORM SYSTEM®
Product	Storm Small P300
Article no.	1A00.0128.xx15

SPECIFICATIONS

Weight	793 g
Material	Aluminium
IP protection grade	IP20
Labelling	CE
Fixture finish	For xx-codes review STORM SYSTEM® – COLOUR CODES >
Max. load	2.25kg (including bottom fixture)

OPTIONAL ACCESSORIES

Storm Small Plaster Ring	1A00.0001.01
Storm Small Back-Mounted Ring	1A00.0048.xx
Storm Small Output	1A00.0500.xx

NOTE

A 3m long cable is included.

BOTTOM FIXTURE

Please note that the bottom fixture is interchangeable and compatible with various Storm Small light products and therefore not included.

For light source information please see the chosen fixture's specific datasheet.

STORM SMALL P300

IMPORTANT INFORMATION

Installation and mounting must be performed by a certified electrician only, and instructions must be followed

Always make sure the main power is off during installation. Pay attention to the fixture remarks, and always make sure to use the correct voltage.

CLEANING AND MAINTENANCE:


Use a soft moist cloth for cleaning. No further maintenance is required.

WARRANTY:

If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

COMPONENTS

- 3m Cord
- Storm Small Output
- Storm Small P300 tube



PLEASE NOTE:

The bottom fixture is interchangeable and compatible with various Storm Small products.

The bottom fixture and light kit are sold separately


ASSEMBLY INSTRUCTION PAGE 1 OF 2

STEP 1

Make sure the main power is switches OFF before starting the installation!



Attach the supplied 3m cord to ceiling output (do not connect the power before the complete fixture is assembled)

Connect the cable with your chosen fixtures cable.

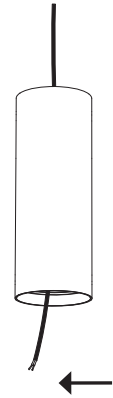

STEP 2

Mount the chosen bottom fixture/light source according to its accompanying assembly instructions.

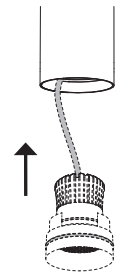

IMPORTANT INFORMATION

Disassembly must be performed by a certified electrician only, and instructions must be followed.

WARRANTY:


If the product is defect, please contact your supplier immediately. Please note that warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair.

STORM SMALL P300

DISASSEMBLY INSTRUCTION


STEP 1

Remove the bottom fixture according to its accompanying disassembly instructions.




STEP 2

Disconnect the cables

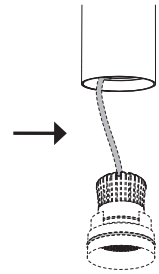

STEP 3

Dismount the Storm P300 Tube from the Storm Output, do this by slightly pushing the Storm P300 tube up, whilst gently rotating the fixture until it unlocks.

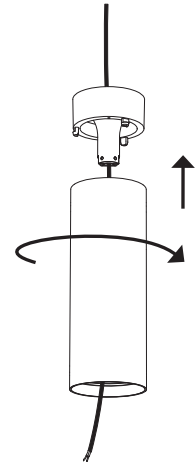

STEP 4

Unfasten the cable from the Storm Output and pull the cable out through the fixture.

