


# MOVE IT 25 system

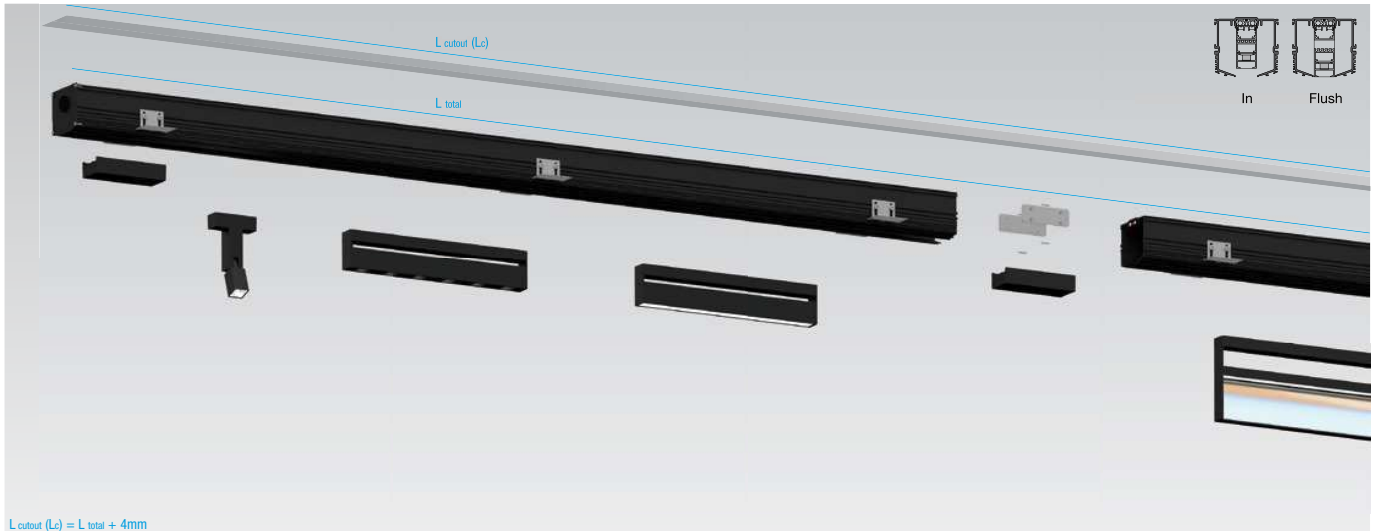

$L_{\text{coutout}} (L_c) = L_{\text{total}} + 4\text{mm}$

## MOVE IT 25

	<p><b>MOVE IT 25</b> Installation track 24V-13A   DALI</p> <p><b>L (MM)</b></p> <p>500 1000 1500 2000 3000 custom cut</p> <p><b>CODE</b></p> <p>051-1022008 051-1023008 051-1024008 051-1025008 051-1027008 E82750xxxx8</p>
	<p><b>MOVE IT 25</b> Mounting bracket set</p> <p><b>TYPE</b></p> <p>1 set 25 sets</p> <p><b>CODE</b></p> <p>051-1060000 051-1060000.25</p> <p>ceiling thickness: 10   12,5   15   20   25</p> <p>number of brackets required: length of your system in metres + 2 sets</p>
	<p><b>MOVE IT 25</b> End caps</p> <p><b>CODE</b></p> <p>051-1040008</p>
	<p><b>MOVE IT 25</b> Linear connector</p> <p><b>TYPE</b></p> <p>1 set 10 sets</p> <p><b>CODE</b></p> <p>051-1050000 051-1050000.10</p>
	<p><b>MOVE IT 25</b> Corner connector 90°</p> <p><b>CODE</b></p> <p>051-1030008</p>

## D

Profilsystem mit 25mm Fugenbreite für flexible Aufnahme der Light Insets  
Befestigung der Light Insets mit Magnethalterung für absolut flexible Anordnung  
Light Insets wahlweise mit Spot-Charakteristik, mit opaler Abstrahlung oder als Wallwasher erhältlich  
Einsatz von Pendelleuchten Tula und Cord möglich  
Profil geeignet für randlosen Einbau in Gipskartondecken von 10-25mm  
Energieeffiziente LEDs mit hoher Farbwiedergabe  
Lieferbar in Lichtfarben 2700K und 3000K  
Insets dimmbar mit DALI Signal

## E

Profile system with 25mm gap for flexible insertion of light insets  
Mounting of Light insets via magnet for absolute positioning flexibility  
Light insets optionally available either with spot-characteristic, with opal radiation or as wallwasher  
Use of suspended luminaires Tula and Cord possible  
Profile suited for trimless installation in plasterboard ceilings 10-25mm  
Energy efficient LEDs with high CRI  
Available in 2700K and 3000K  
Insets dimmable via DALI signal

## F

Système de profilé av. joint 25 mm de larg. pr récept. flexible de Light Insets  
Fixation des Light Insets av. support aimanté pr une disposit. totalermt flexible  
Light Insets disponibles en option avec caractéristique spot, avec rayonnement opale ou comme Wallwasher  
Utilisation possible de luminaires pendules Tula et Cord  
Profil adapté pr installation ss rebord ds plafonds en placoplatre de 10-25mm  
LEDs à grande efficacité énergétique avec rendu élevé des couleurs  
Disponible dans les températures de couleur 2700K et 3000K  
Insets dimmables avec signal DALI

## POWER TRANSMISSION

	<p><b>MOVE IT 25</b> Feeder unit 24V-13A   DALI</p> <p><b>CODE</b></p> <p>051-1070000</p>
	<p><b>MOVE IT 25</b> Track connector 24V-13A   DALI</p> <p><b>TYPE</b></p> <p>linear corner</p> <p><b>CODE</b></p> <p>051-1070100 051-1070200</p>

## WIRE CROSS-SECTIONAL AREA

		DISTANCE POWER SUPPLY TO TRACK / CABLE THICKNESS (mm <sup>2</sup> )					
		5m	10m	15m	20m	25m	30m
MAX. SYSTEM POWER / MAX. SYSTEM LENGTH	50W / 80m	1,5	1,5	1,5	2,5	2,5	2,5
	60W / 60m	1,5	1,5	1,5	2,5	2,5	
	70W / 55m	1,5	1,5	2,5	2,5		
	80W / 60m	1,5	1,5	2,5			
	95W / 40m	1,5	1,5	2,5			
	105W / 30m	1,5	2,5	2,5			
	120W / 40m	1,5	2,5				
	130W / 30m	1,5	2,5				
	140W / 25m	1,5	2,5				
	155W / 20m	1,5	2,5				
165W / 25m	1,5						
240W / 20m	2,5						
320W / 10m	2,5						

Use a transformer with 25% overcapacity compared to the total system power installed.

## LED CONVERTER NON DIMMABLE

	<p><b>LED CONVERTER</b> 24V DC</p> <p><b>TYPE</b></p> <p>75W 100-240V AC 100W 110-264V AC 150W 110-264V AC 185W 90-264V AC 240W 90-264V AC 320W 90-305V AC</p> <p>ENEC approved ENEC approved</p> <p><b>L/B/H (MM)</b></p> <p>180/60/30 270/63/41 270/63/41 228/68/39 244/68/39 252/90/44</p> <p><b>CODE</b></p> <p>002-61575 002-60102 002-60152 002-60185 002-60240 002-60241</p>
--	---

**INSET SINGLE SPOT**

		<b>e<sup>2</sup> LED</b>	<b>INSET SINGLE SPOT</b>	<b>TYPE</b>	<b>L (MM)</b>	<b>CODE</b>
			3W LED   120 lm*	051-...4... 2700K	305	051-1251#380
				051-...5... 3000K	605	051-1252#380

**LED COLOUR TEMPERATURE**

2700K	3000K	*System power   Luminous flux 3000K
-------	-------	-------------------------------------

**LED LENSE**

		051-...S... spot 4°	051-...M... medium 15°
--	--	---------------------	------------------------

**INSET OPAL**

		<b>e<sup>2</sup> LED</b>	<b>INSET OPAL FLUSH</b>	<b>TYPE</b>	<b>L (MM)</b>	<b>CODE</b>
			4W LED   570 lm*	305	051-1251#380	
			7W LED   1100 lm*	605	051-1252#380	

**INSET SPOT**

		<b>e<sup>2</sup> LED</b>	<b>INSET SPOT FLUSH</b>	<b>TYPE</b>	<b>L (MM)</b>	<b>CODE</b>
			3x1,2W   220 lm*	155	051-1250#38M	
			6x1,2W   430 lm*	305	051-1251#38M	
			12x1,2W   870 lm*	605	051-1252#38M	

		<b>e<sup>2</sup> LED</b>	<b>INSET SPOT IN</b>	<b>TYPE</b>	<b>L (MM)</b>	<b>CODE</b>
			3x1,2W   220 lm*	155	051-1150#38S	
			6x1,2W   430 lm*	305	051-1151#38S	
			12x1,2W   870 lm*	605	051-1152#38S	

**INSET WALLWASHER**

		<b>e<sup>2</sup> LED</b>	<b>INSET WALLWASHER</b>	<b>TYPE</b>	<b>L (MM)</b>	<b>CODE</b>
			4W LED   450 lm*	305	051-1751#38A	
			7W LED   900 lm*	605	051-1752#38A	

**LED COLOUR TEMPERATURE**

2700K	3000K	*System power   Luminous flux 3000K
-------	-------	-------------------------------------

**INSET TULA**

		<b>e<sup>2</sup> LED</b>	<b>INSET TULA NANO</b>	<b>TYPE</b>	<b>H (MM)</b>	<b>CODE</b>
			5W LED   230 lm*	500	053-5280#1#M	

		<b>e<sup>2</sup> LED</b>	<b>INSET TULA MICRO</b>	<b>TYPE</b>	<b>H (MM)</b>	<b>CODE</b>
			5W LED   230 lm*	300	053-5380#1#M	
			5W LED   230 lm*	500	053-5580#1#M	

**LED COLOUR TEMPERATURE**

2700K	3000K	*System power   Luminous flux 3000K
-------	-------	-------------------------------------

**COLOUR**

	053-...4... chrome
	J matt anodised aluminium
	L matt anodised black



**INSET CORD**

		<b>e<sup>2</sup> LED</b>	<b>INSET CORD</b>	<b>TYPE</b>	<b>H (MM)</b>	<b>CODE</b>
			5W LED   230 lm*	400	053-5480#1#M	

**LED COLOUR TEMPERATURE**

2700K	3000K	*System power   Luminous flux 3000K
-------	-------	-------------------------------------

**COLOUR**

	053-...0... clear-silver
	6 chrome
	7 white
	8 black



