

## DORVAL WALL



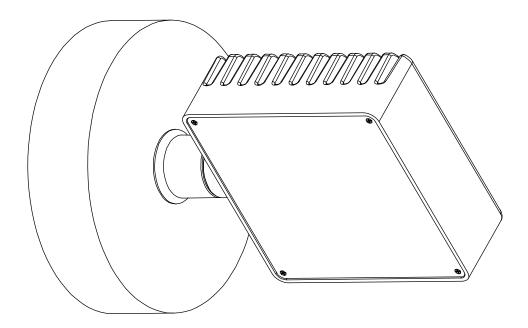

- Please read entire manual before installation
- To be installed by an electrician to an electrical box
- Use appropriate screws and anchors where necessary
- Wear enclosed gloves when handling lamp
- Handle materials with care. Please consult lamp maintenance sheet on our web site


(350° rotation)





Secure universal bracket to junction box or directly to the wall. Use appropriate screws and anchors if necessary (not provided)


The universal bracket has a short flange and a long flange. Be sure the long flange is on the bottom. It is used to secure the fixture properly.

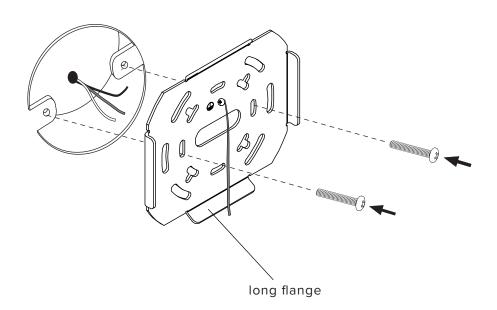



Make connections. Pass the wires through the anti-abrasive sleeve.

If applicable, use grey and purple wires for 0-10V, circuit before closing the fixture.

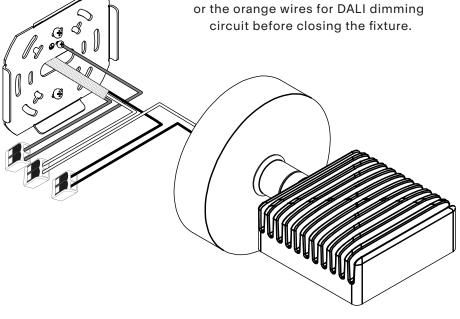

for 120 V wiring



black white green (neutral) (line) (ground)

\_\_\_\_\_\_ 11mm

for 220-240 V wiring



blue brown (neutral) (line)




yellow/ green (ground)







groove for

## Secure fixture to universal bracket







Push the bottom part of fixture against the wall.

Be sure no wires are pinched or damaged during this step.

