





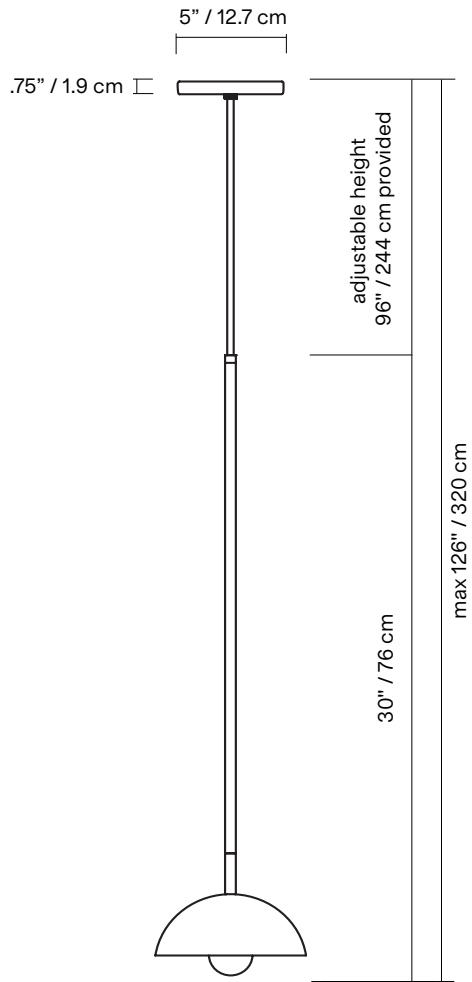


BEAUBIEN SIMPLE SHADE



The Beaubien Collection's strong black lines bend in and out of space, moving effortlessly between simplicity and ornamentation. Round and cubic brass connectors complete the lamps' structures and add a rich material contrast to the powder coated rods. The collection's industrial and graphic aesthetic is imbued with a palette of influences, from traditional Chinese screens to the Memphis movement. Each influence strengthens the collection, creating nuance within its timeless character.

| | |
|-----------------------|--|
| TYPE | Pendant |
| CONSTRUCTION | Powder coated steel body and canopy Powder coated aluminum shade Brass hardware Milk glass globes Polyester cord |
| SPECIFICATIONS | Source: LED lamp provided (G9 base) Power consumption: 3.5W Lumen output: 182lm Colour temperature: 2700K included * 3000K available upon request Colour rendering index: ≥ 90 CRI standard Expected lifetime: ≥ 25 000h |
| CONTROL | Refer to our recommended list of dimmer models |
| WEIGHT | Min. 1.5 lb / 0.7 Kg |
| CERTIFICATIONS |      IP20 |
| WARRANTY | 2 years |



G50 $\varnothing \pm 2" / 50 \text{ mm}$

*dimensions are approximate and may vary slightly

FINISH



BK
Flat black



BR
Brass




GR
Graphite

NOTES

- Must be installed by an electrician
- Shades only available in black, not brass
- Not protected against liquids (refer to IP20)
- Additional charges for modifications or for special orders
- Please refer to maintenance sheet on website for cleaning instructions

LAMP ANATOMY

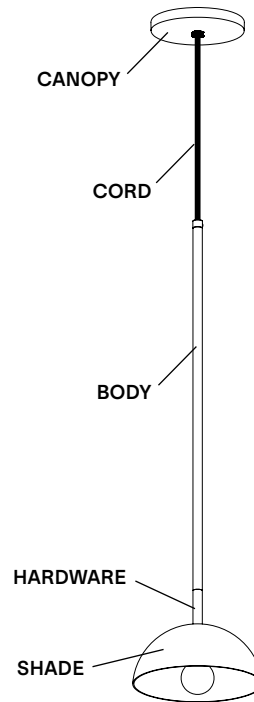

WALL

| | | Example | Fill with your selection |
|-------------------|---------------------------------------|------------------|--------------------------|
| COLLECTION | BEA Beaubien | BEA | BEA |
| MODEL | 03 | 03 | 03 |
| FINISH | BK Flat black | BK | BK |
| HARDWARE | BR Brass GR Graphite | BR | |
| FULL SKU | | BEA03BKBR | |
| | | NOTES | |

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|------------------|----------------|-----------|-----------|------------------|
| LUTRON - MAESTRO | MAELV-600 | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | SELV-300P | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | SELV-300P | 100% | 0% | Phase Cut |
| LUTRON - SKYLARK | CTELV-303P | 100% | 0% | Phase Cut |
| LUTRON - DIVA | DVELV-300P | 100% | 0% | Phase Cut |
| LEGRAND - ADORNE | TRUE UNIVERSAL | 100% | 30% | Phase Cut |

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

Phase cut dimming (leading edge or trailing edge**)

| DIMMER BRAND | MODEL | MAX LEVEL | MIN LEVEL | DIMMING PROTOCOL |
|-----------------|-----------|-----------|-----------|------------------|
| VARILIGHT | V-PRO | 100% | 2% | Phase Cut |
| LEGRAND - NILOÉ | 3 996 35 | 87% | 15% | Phase Cut |
| NIKO | 310-0280X | 94% | 5% | Phase Cut |
| NIKO | 310-0190X | 100% | 1% | Phase Cut |

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

Some dimmers require a minimum load, check specifications.

*Other dimmers that specify LED lamp compatibility may operate without issue.

We recommend conducting your own test before final installation.

**Leading edge is also known as TRIAC or Forward Phase.

Trailing edge is also known as ELV or Reverse Phase.
