

TINTO PENDANT (FLEX)

FINISH

bronze with black braided flex
satin brass with black braided flex

DIMENSIONS (body of fixture)

ø 450 x 145 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 265 mm

maximum on request 6265 mm

supplied with 1000 mm flex

ILLUMINATION

integrated LED - 8w - 2700K

LED driver to be installed in the ceiling rose

drivers must be installed up to 20 meters from the body of the light

DIMMING

trailing edge dimmable / phase cut (rotary dimmer) - standard


DALI option available (220-240v only)

0/1-10v (220-240v or 110-130v) - on request


CEILING ROSE / PLATE

round ceiling rose - ø 45 x 120 mm (dia x h)


CERTIFICATION

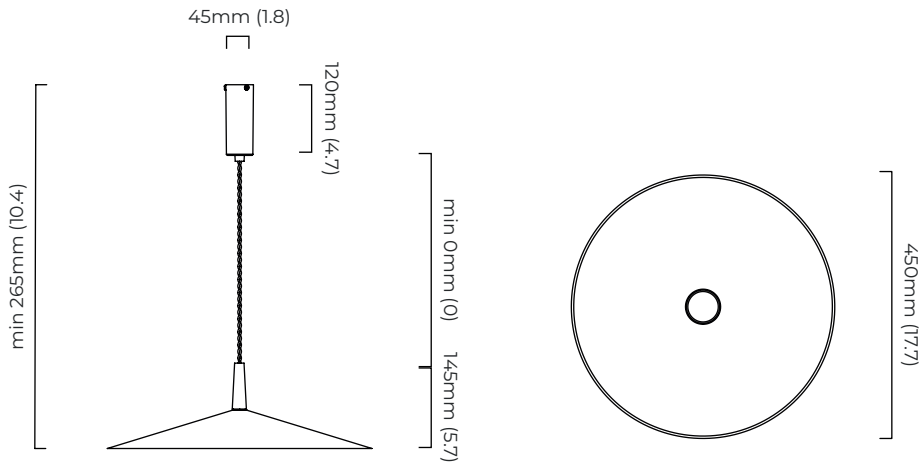

mounting plate dimensions



North America junction box cover



*Diagrams are not to scale.

| SKU NUMBER | FINISH DESCRIPTION | VOLTAGE |
|----------------|-------------------------------------|------------|
| TINPEMBZBF-240 | bronze with black braided flex | 220 - 240V |
| TINPEMSBBF-240 | satin brass with black braided flex | 220 - 240V |
| TINPEMBZBF-110 | bronze with black braided flex | 110 - 130v |
| TINPEMSBBF-110 | satin brass with black braided flex | 110 - 130v |

TINTO PENDANT (FLEX) - DALI-A

FINISH

bronze with black braided flex
satin brass with black braided flex

DIMENSIONS (body of fixture)

ø 450 x 145 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 265 mm

maximum on request 6265 mm

supplied with 1000 mm flex

ILLUMINATION

integrated LED - 8w - 2700K

DALI converter to be installed in the ceiling cavity

drivers must be installed up to 20 meters from the body of the light

DIMMING

DALI compatible


CEILING ROSE / PLATE

round ceiling rose - ø 45 x 120 mm (dia x h)

CERTIFICATION



mounting plate dimensions

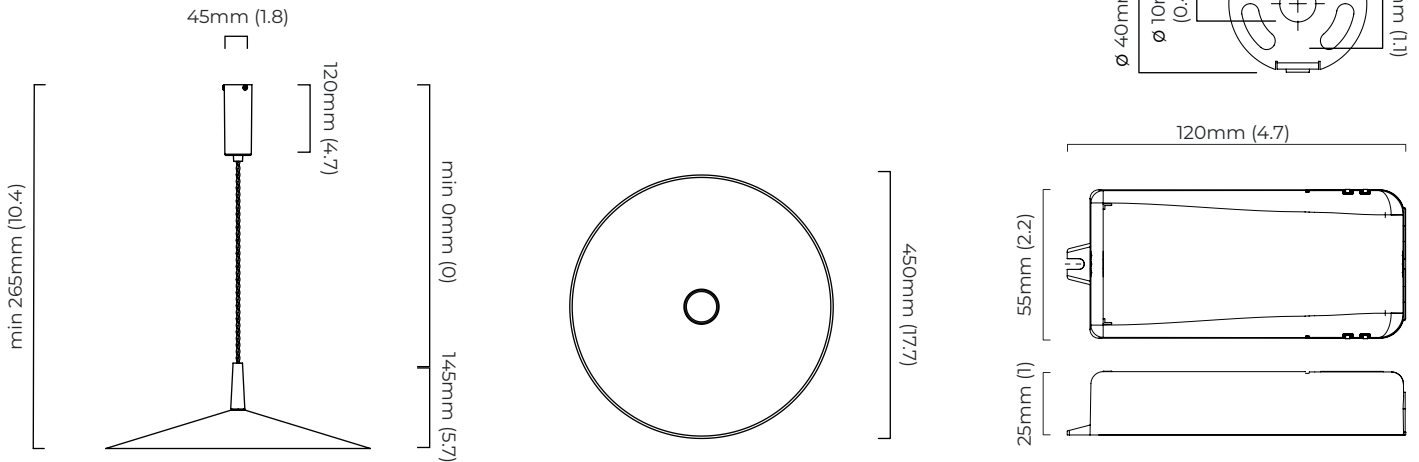

*Diagrams are not to scale.

| SKU NUMBER | FINISH DESCRIPTION | TYPE OF DALI | VOLTAGE |
|----------------------|-------------------------------------|---|------------|
| TINPEMBZBF-DALIA-240 | bronze with black braided flex | DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity | 220 - 240V |
| TINPEMSBBF-DALIA-240 | satin brass with black braided flex | DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity | 220 - 240V |

TINTO PENDANT (FLEX) - DALI-B

FINISH

bronze with black braided flex
satin brass with black braided flex

DIMENSIONS (body of fixture)

ø 450 x 145 mm (dia x h)

WEIGHT

7kg (15.4lbs)

please ensure ceiling structure is strong enough to support the weight of the light

OVERALL DROP

minimum 180 mm
maximum on request 6180 mm
supplied with 1000 mm flex

ILLUMINATION

integrated LED - 8w - 2700K
DALI LED driver to be installed in the ceiling rose


DIMMING

Dali compatible

CEILING ROSE / PLATE

round ceiling rose - ø 140 x 35 mm (dia x h)

CERTIFICATION

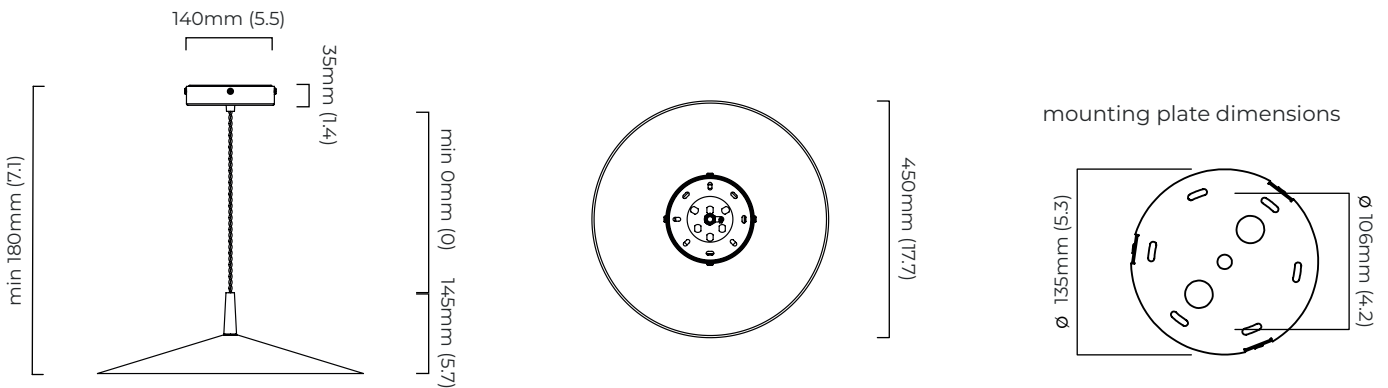

*Diagrams are not to scale.

| SKU NUMBER | FINISH DESCRIPTION | TYPE OF DALI | VOLTAGE |
|----------------------|-------------------------------------|--|------------|
| TINPEMBZBF-DALIB-240 | bronze with black braided flex | DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity. | 220 - 240V |
| TINPEMSBBF-DALIB-240 | satin brass with black braided flex | DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity. | 220 - 240V |